





# N-Channel Enhancement Mode Power MOSFET

## RY7N60

### MAIN CHARACTERISTICS


$I_D$	7A
$V_{DSS}$	600V
$R_{DS(on)-max}$ (@ $V_{GS}=10V$ )	1.2 $\Omega$
$Q_G$ -typ	24nC




RY7N60C/TO-220C

### FEATURES

- Fast Switching
- Low ON Resistance
- Low Gate Charge
- 100% Single Pulse avalanche energy Test



RY7N60F/TO-220F




RY7N60A3/TO-263

### APPLICATIONS

- Power switch circuit of adaptor and charger.

### MECHANICAL DATA

- Case: Molded plastic
- Mounting Position: Any
- Molded Plastic: UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275 $^{\circ}$ C maximum, 10s per JESD 22-B106



RY7N60A1/TO-251



RY7N60A2/TO-252

### Marking on the body



#### MAKING:

X X X X X X

- Assembly code ( e.g : AB,CD,..... )
- Material -Code  
(H:No halogen A:ordinary)
- Week - code (WW:01~52)
- Year - code  
(Y: Last digit of year & A:2012,B:2013. . . )

### Ordering information

Part Number	Package	Unit Weight	Base Quantity	Delivery mode
RYF7N60C	TO-220C	0.07oz(1.96g)	50 pcs / tube	1Kpcs/box 5Kpcs/carton
RYF7N60F	TO-220F	0.06oz(1.74g)	50 pcs / tube	1Kpcs/box 5Kpcs/carton
RY7N60A3	TO-263	0.04oz(1.16g)	50 pcs / tube	1Kpcs/box 5Kpcs/carton
RY7N60A3	TO-263	0.04oz(1.16g)	800 pcs / reel	800pcs/box 4Kpcs/carton
RY7N60A1	TO-251	--	--	--
RY7N60A2	TO-252	0.011oz(0.32g)	2500 pcs / reel	2.5Kpcs/box 12.5Kpcs/carton



# N-Channel Enhancement Mode Power MOSFET

## R Y7N60

### Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbol	Value			Unit
		220C/263	220F	251/252	
Drain-Source Voltage	$V_{DS}$	600			V
Gate-Source Voltage	$V_{GS}$	±30			V
Continue Drain Current	$I_D$	7			A
Pulsed Drain Current (Note1)	$I_{DM}$	28			A
Power Dissipation	$P_D$	142	51	120	W
Single Pulse Avalanche Energy (Note1)	$E_{AS}$	350			mJ
Operating Temperature Range	$T_J$	150			°C
Storage Temperature Range	$T_{STG}$	-55 to +150			°C
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	3.57	1.25	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	62.5	100	°C/W

Note1:Pulse test: 300 μs pulse width, 2 % duty cycle

### Electrical Characteristics at Tc=25°C unless otherwise specified

Characteristics	Test Condition	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0 V, I_D = 250 \mu A$	$BV_{DSS}$	600	-	-	V
Drain-Source Leakage Current	$V_{DS} = 600 V, V_{GS} = 0 V$	$I_{DSS}$	-	-	1	μA
Gate Leakage Current	$V_{GS} = \pm 30 V, V_{DS} = 0 V$	$I_{GSS}$	-	-	±100	nA
Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu A$	$V_{GS(th)}$	2	-	4	V
Drain-Source On-State Resistance	$V_{GS} = 10 V, I_D = 3.5 A$	$R_{DS(on)}$	-	-	1.2	Ω
Forward Transconductance	$V_{DS} = 15 V, I_D = 3.5 A$	$g_{fs}$	-	6.5	-	S
Input Capacitance	$V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz$	$C_{iss}$	-	1130	-	pF
Output Capacitance		$C_{oss}$	-	93	-	pF
Reverse Transfer Capacitance		$C_{rss}$	-	6	-	pF
Turn-on Delay Time(Note2)	$I_D = 7 A, V_{DD} = 300 V, R_G = 10 \Omega$	$t_{d(ON)}$	-	18	-	ns
Rise Time(Note2)		$t_r$	-	22	-	ns
Turn-Off Delay Time(Note2)		$t_{d(OFF)}$	-	40	-	ns
Fall Time(Note2)		$t_f$	-	19	-	ns
Total Gate Charge(Note2)	$I_D = 7 A, V_{DD} = 480 V, V_{GS} = 10 V$	$Q_G$	-	24	-	nC
Gate to Source Charge(Note2)		$Q_{GS}$	-	5	-	nC
Gate to Drain Charge(Note2)		$Q_{GD}$	-	10	-	nC

### Source-Drain Diode Characteristics at Ta=25°C unless otherwise specified







Characteristics	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Maximun Body-Diode Continuous Current		$I_S$	-	-	7	A
Maximun Body-Diode Pulsed		$I_{SM}$	-	-	28	A
Drain-Source Diode Forward Voltage	$I_{SD} = 7 A$	$V_{SD}$	-	-	1.4	V
Reverse Recovery Time(Note2)	$I_{SD} = 7 A, V_{GS} = 0 V, di_F / dt = 100 A/\mu s$	$t_{rr}$	-	360	-	ns
Reverse Recovery Charge(Note2)		$Q_{rr}$	-	2	-	μC

Note2:Pulse test: 300 μs pulse width, 2 % duty cycle



# RY7N60


## RATINGS AND CHARACTERISTIC CURVES

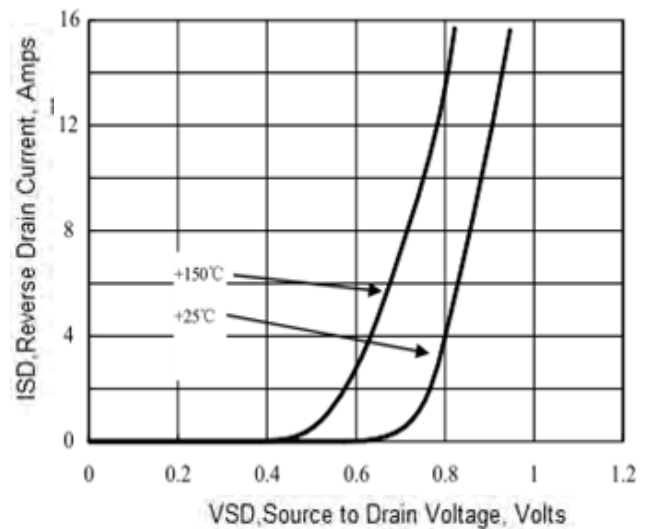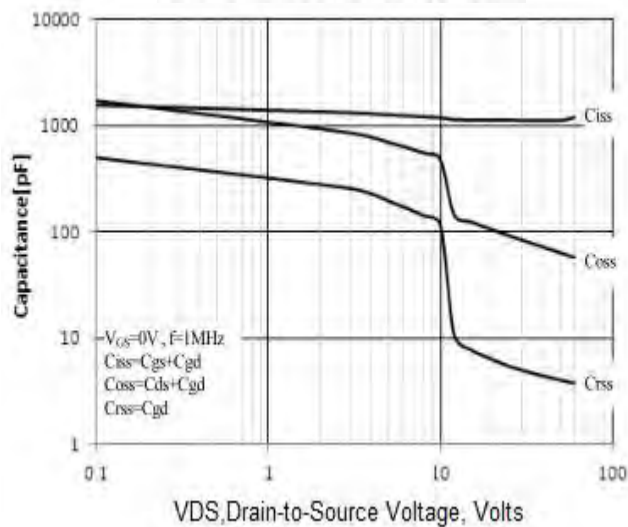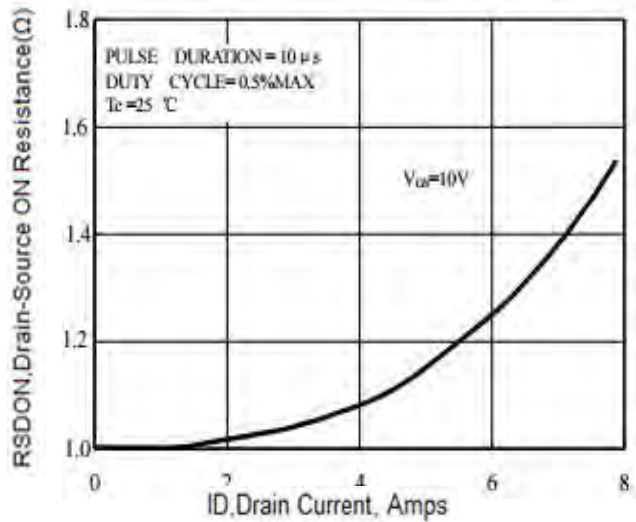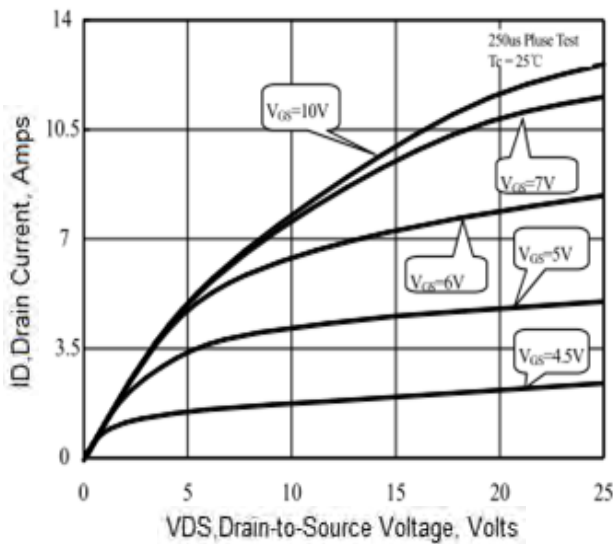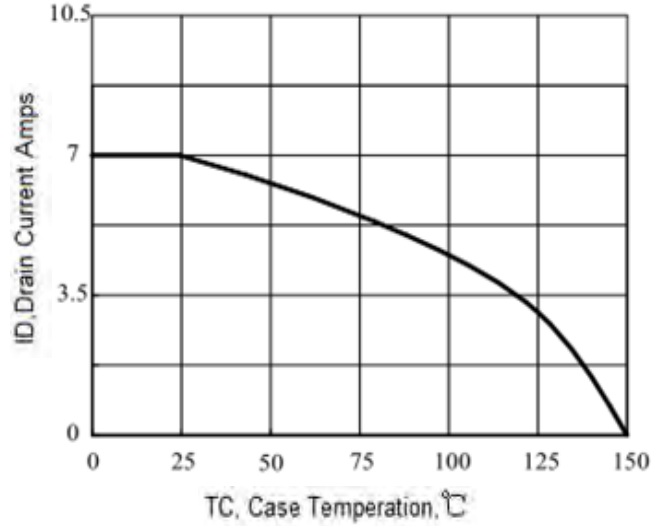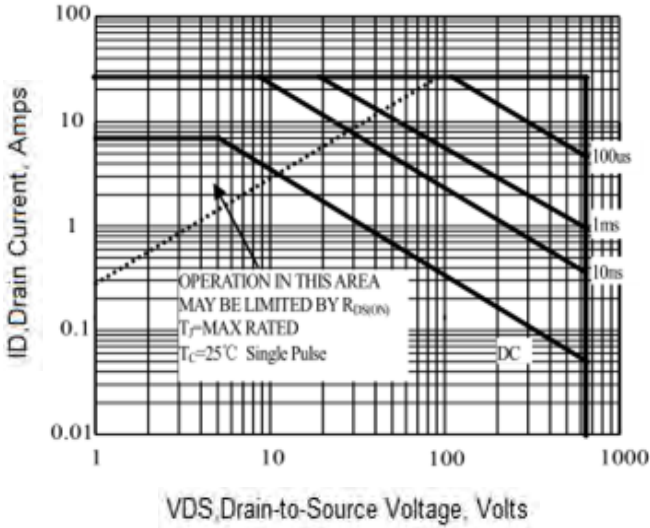


# RY7N60

Package Outline Dimensions millimeters


TO-220AB

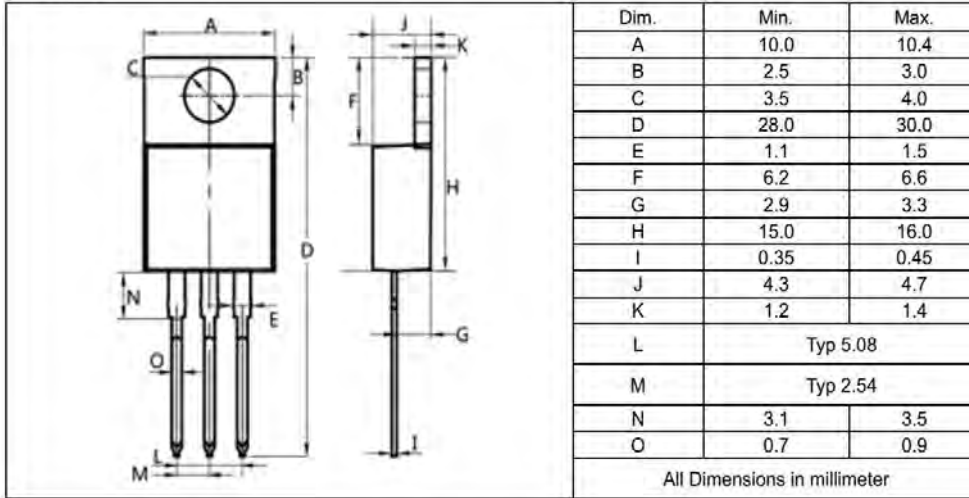

TO-220F

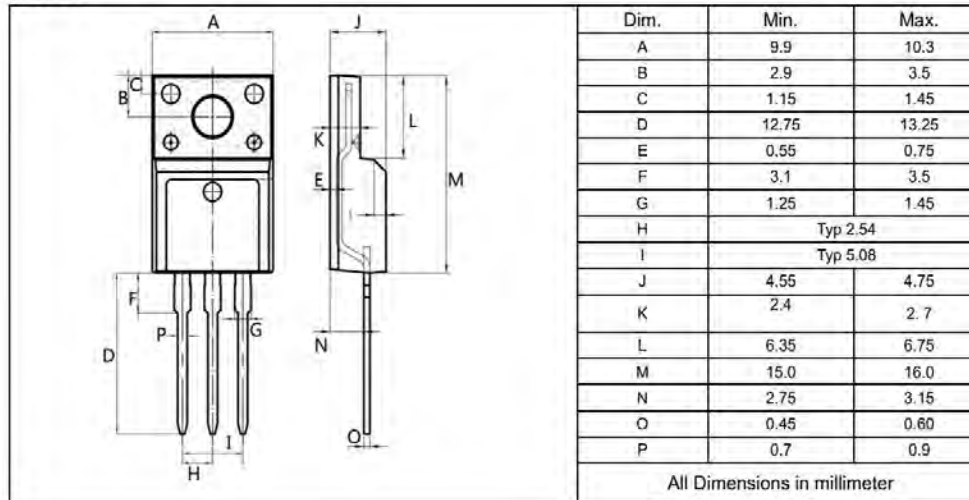


TO-263

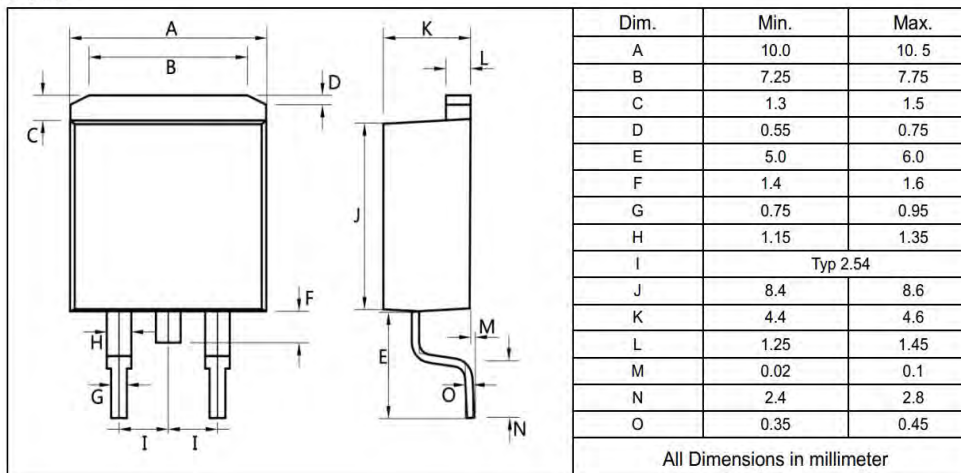

# RY7N60

Package Outline Dimensions millimeters

TO-252

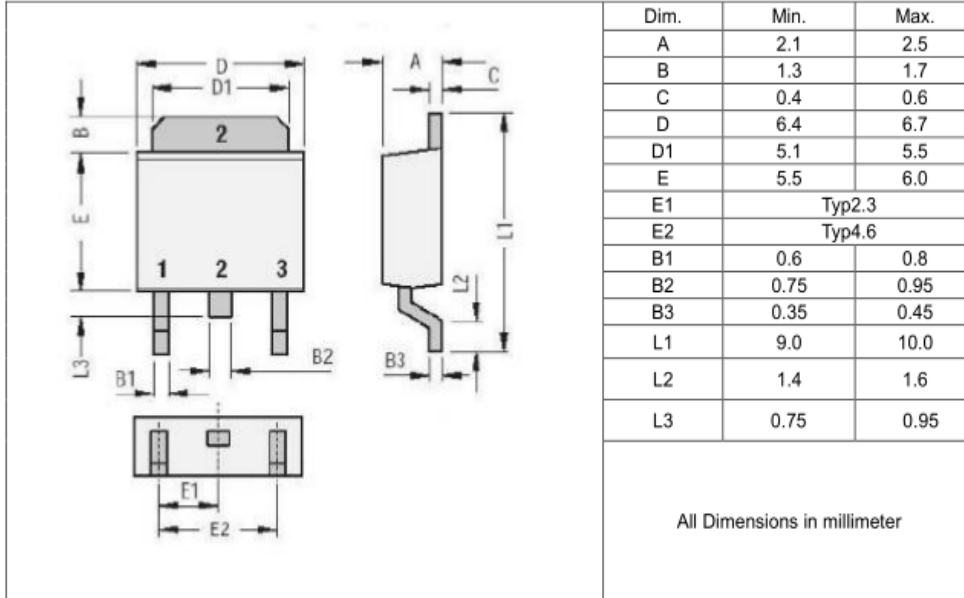

TO-251

